



# FLEXpower™ TWO

Fully Pre-Wired Dual Inverter System

- Fully Pre-Wired System
- Simplified Installation
- Field Configurable Settings
- Optimized System Footprint
- Ample AC and DC Breaker Provisions
- Factory Tested



The new FLEXpower TWO System accommodates all of the essential protective devices in an easy-to-install, fully pre-wired and factory tested dual inverter system. The FLEXpower TWO is ideal for applications with medium sized power requirements such as homes, light commercial or larger back-up power systems. Utilizing a compact design and an easy-to-install mounting plate, the FLEXpower TWO System can be mounted in either a horizontal or vertical orientation to allow installation in more space-limited locations and is designed for a quick installation, saving both time and money.

FLEXpower TWO includes two inverter/chargers, AC and DC wiring boxes, a MATE2, HUB, and Surge Protector with optional kits for charge controllers and DC system monitoring, while maintaining a small system footprint.

The FLEXpower TWO System is also equipped with battery breakers, an Input-Output-Bypass Assembly, mounting locations for GFCI Type B style AC outlets and locations for additional AC breakers. FLEXpower TWO components carry all of the necessary ETL Certifications allowing for a code compliant installation that saves both time and money while still looking great.

The OutBack Power FLEXpower TWO System is the only choice when you need a fully integrated, true sinewave, reliable power system.

# FLEXpower TWO Specifications

## For 120/240 VAC/60 Hz Applications


Prewired Systems*	Description
FP2-10	Dual VFX3648 7.2 kW FLEXpower TWO, Prewired AC and DC boxes with AC Bypass, two 175 Amp DC breakers, MATE2, HUB10, RTS, FW-X240 and surge protector
FP2-12	Dual VFX3524 7 kW FLEXpower TWO, Prewired AC and DC boxes with AC Bypass, two 250 Amp DC breakers, MATE2, HUB10, RTS, FW-X240 and surge protector
FP2-25	Dual GTFX3048 6 kW FLEXpower TWO, Prewired AC and DC boxes with AC Bypass, two 175 Amp DC breakers, MATE2, HUB10, RTS and surge protector
FP2-28	Dual GVFX3524 7 kW FLEXpower TWO, Prewired AC and DC boxes with AC Bypass, two 250 Amp DC breakers, MATE2, HUB10, RTS and surge protector
FP2-29	Dual GVFX3648 7.2 kW FLEXpower TWO, Prewired AC and DC boxes with AC Bypass, two 175 Amp DC breakers, MATE2, HUB10, RTS and surge protector
FP2-31	Dual FX3048T 6 kW FLEXpower TWO, Prewired AC and DC boxes with AC Bypass, two 175 Amp DC breakers, MATE2, HUB10, RTS, FW-X240 and surge protector
FP2-32	Dual FX2524T 5 kW FLEXpower TWO, Prewired AC and DC boxes with AC Bypass, two 250 Amp DC breakers, MATE2, HUB10, RTS, FW-X240 and surge protector

## For 230 VAC/50 Hz Applications

FP2-22	Dual VFX3048E 6 kW FLEXpower TWO, Prewired AC and DC boxes with 230 VAC Bypass, two 175 Amp DC breakers, MATE2, HUB10 and RTS
FP2-24	Dual VFX3024E 6 kW FLEXpower TWO, Prewired AC and DC boxes with 230 VAC Bypass, two 250 Amp DC breakers, MATE2, HUB10 and RTS

<b>Weight</b>	<b>Unit</b>	232 lbs (105 kg)
	<b>Shipping</b>	282 lbs (127 kg)
<b>Dimensions (H x W x L)</b>	<b>Unit</b>	20.25 x 46.5 x 13" (51.4 x 118.1 x 33 cm)
	<b>Shipping</b>	21.5 x 47.5 x 20.5" (54.6 x 120.7 x 52.1 cm)

\* Individual FLEXpower ONE components carry all necessary ETL Certifications. \* Additional configurations available.

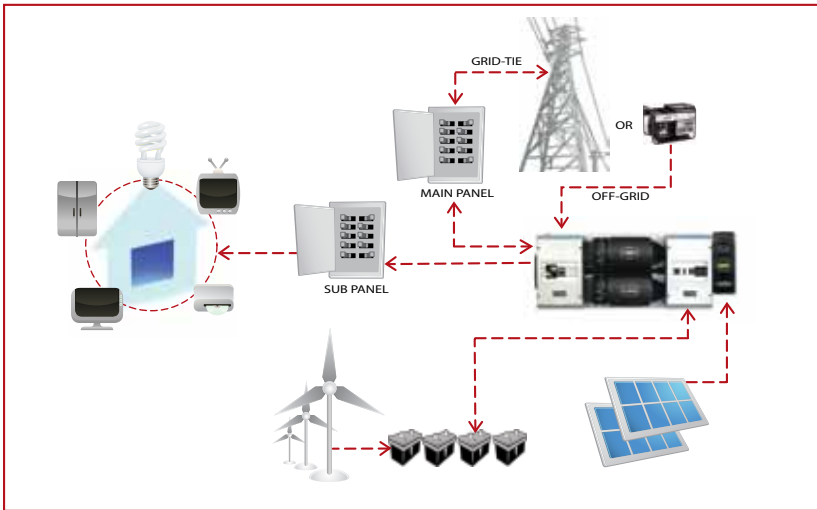

Available From:



**Corporate Office:**  
5917 195th St. NE  
Arlington, WA 98223 USA  
Phone: +1 360 435 6030  
Fax: +1 360 435 6019

**European Office:**  
Hansastrasse 8  
D-91126  
Schwabach, Germany  
Phone: +49 9122 79889 0  
Fax: +49 9122 79889 21

**Asia Office:**  
Suite 1903, Tower 1, China Hong Kong City  
33 Canton Road, Kowloon  
Hong Kong  
Phone: +852 2736 8663  
Fax: +852 2199 7988

**Latin American Office:**  
15105 Cedar Bluff Pl.  
Wellington, FL 33414 USA  
Phone: +1 561 792 9651  
Fax: +1 561 792 7157